

Grease Guardian[®]
Automatic Grease Removal

SEPARATES & REMOVES
GREASE, OIL & FAT FROM KITCHEN WASTE WATER....

- IN DIT WERK VANAF 1977
- VERKOCHT IN MEER DAN 40 LANDEN
- VERWIJDERD MEER DAN 99% VET
- GEEN TOEVOEGINGEN NODIG
- SIMPEL EN SLIM ONTWERP
- KWALITEITS (ISO9001 FIRMA)
- GOEDGEKEURD (CE, ROHS, GOST, EN, NSF, BS)
- EENVOUDIG MONTAGE en ONDERHOUD
- DIRECT BIJ DE BRON TE PLAATSEN
- VOLLEDIG SERVICE

Visit me, *GiorGio*, online to solve your grease problems!






www.horepa.nl



www.horepa.nl

Mail@horepa.nl

Tel: +31 (0) 226 354535

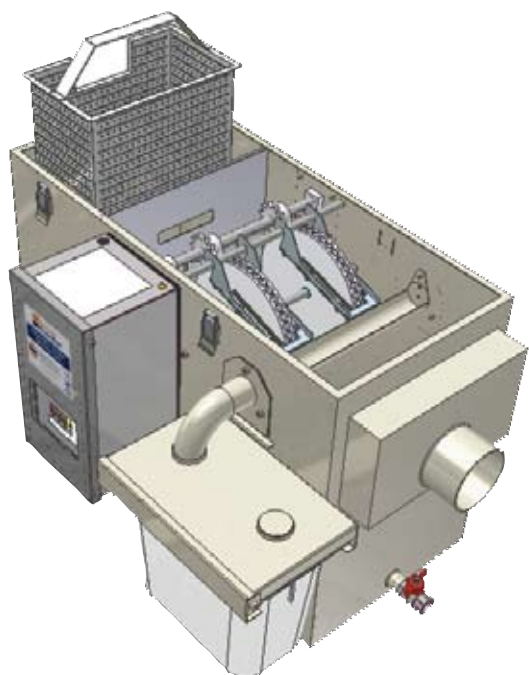

Three Stage Operation System

Stage 1 – Vaste stoffen verwijderen

Wastewater from the kitchen is directed through the inlet of the Grease Guardian[®] where a removable strainer basket collects any solid debris.

Stage 2 – Vet, olie en sludge verzamelen

Grease in the wastewater floats to the surface and is trapped while the clear water leaves the unit and enters the drainage system.

Stage 3 – Zelfreinigen en vet verwijderen

The timer-driven heating element is activated to liquefy grease, which is then removed by the skimming wheel and deposited into a portable container for recycling.

Kan aangesloten worden op:

Pot wash sinks, pre-rinse sinks, combi ovens, Chinese cookers and floor drains



Model	Length (A)	Width (B)	Width (C)	Height (D)	Basket (E)	Inlet/Outlet (F)	Max Flow
<small>ALL DIMENSIONS IN MM</small>	<small>INCLUDES INLET & OUTLET</small>	<small>MAIN TANK</small>	<small>INCLUDING GREASE COLLECTION CONTAINER</small>	<small>WITH LID CLOSED</small>	<small>CLEARANCE NEEDED</small>		
D1	640	310	515	330	200	60	0.75 l/s
D2	720	310	515	410	240	60	1.25 l/s
D3	840	310	620	450	270	90	1.75 l/s
D4	890	310	620	450	270	115	2.25 l/s
D5	1420	310	670	560	390	115	3.50 l/s

Specification: Automatic grease trap with inbuilt grease skimming mechanism. 16 Gauge 304 Stainless Steel, 25 watt motor, 1.0kw heating element, 24 hour digital timer. 230V 50Hz as standard. 110V 60Hz also available. Each wheel skims 12kg of free floating grease per hour. Left-to-right or right to left handling of unit to suit preferred flow direction.

For invert levels please contact your local supplier.

NEDERLAND
HOREPA v.o.f.
Groene Wuiver 3
1718 LM HOOGWOUDE
Nederland
T: +31(0)226 354535
F: +31(0)226 359614
E: mail@horepa.nl
www.horepa.nl

Distributor Details



www.horepa.nl

