
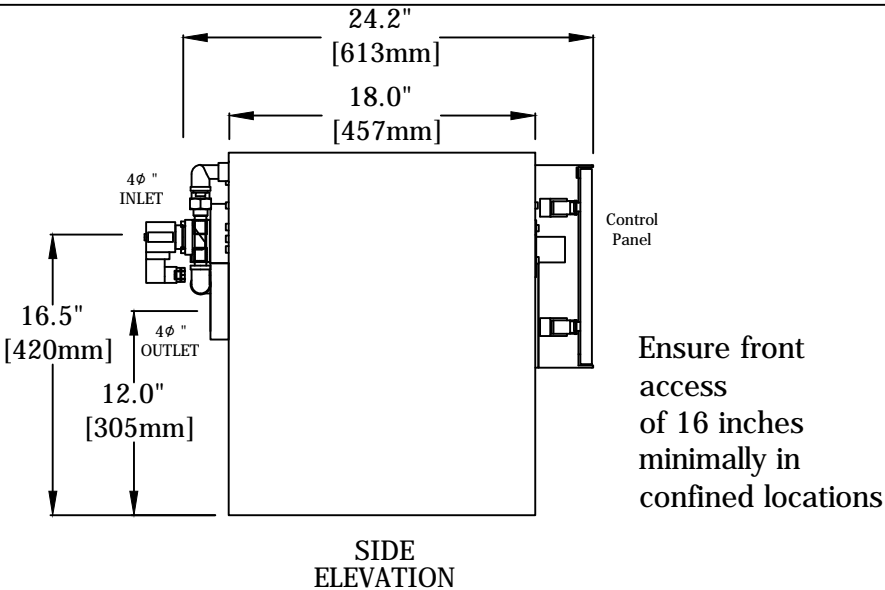


GGX75 Grease Guardian Standard Specification

4" INLET (4½" OD pipe)
4" OUTLET (4½" OD pipe)
1½" OD GREASE OUTLET pipe

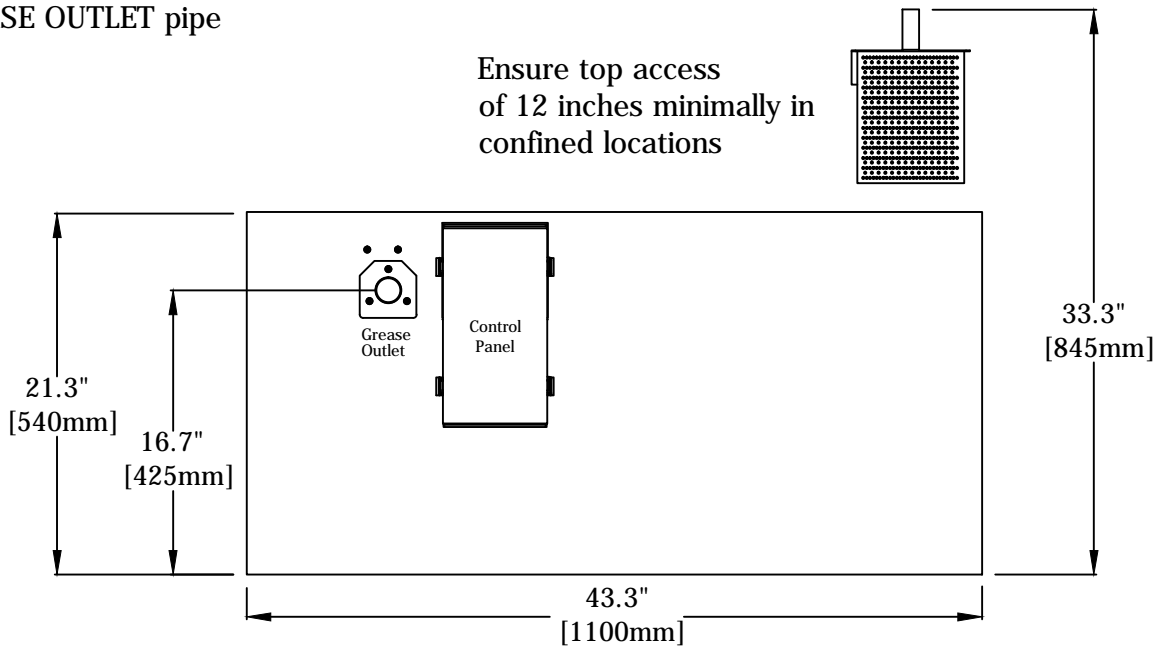

GREASE GUARDIAN X STANDARD FEATURES:

- 3 Year Guarantee
- Fully Automatic Grease Removal Unit (AGRU)
- 16 gauge 304 stainless steel welded tank
- Fully sealed air tight lid
- PLC/HMI automatic controller
- Energy saving mode
- Skimming drum with automatic spray bar wash
- Automatic wash-water conditioning system
- Lift-out solids basket
- Grease Guardian World asset management

TECHNICAL DATA

Net weight (empty)	210 pounds
Gross weight (filled with water)	600 pounds
Exterior Materials	16 gauge AISI304 Stainless Steel
Interior Materials	AISI304 Stainles Steel & Acetal Components
Maximum Flow Rate	75 GPM
Lift-out screen basket capacity	2.5 gallons
Skimming Rate	20 pounds per hour
Grease Retention Capacity	150+ pounds
Hot wash water system operation requirements	12gpm @ 43.5psi (temperture 100-140°F)
Programming/Control	7day, 24hr multi-function PLC
Electrical Load	110VAC, 700W, 6.4A